

EA 50 GH




stage **5V**



5,3 lt Fuel Tank

Front Panel

Handles

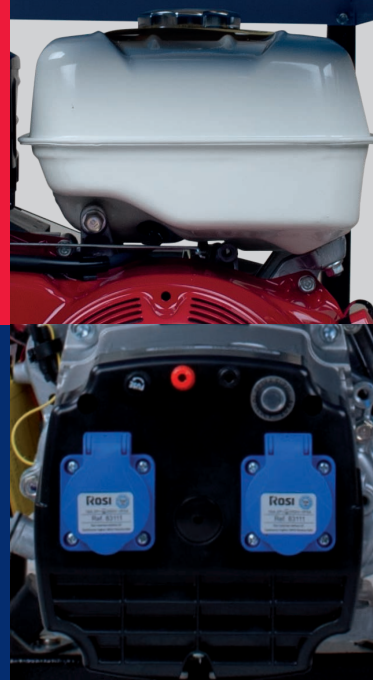

Unit of measure: mm

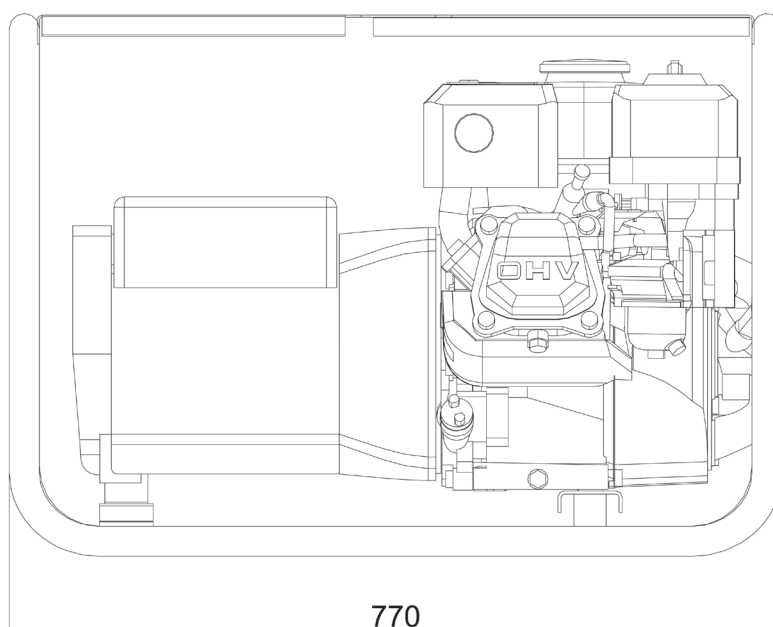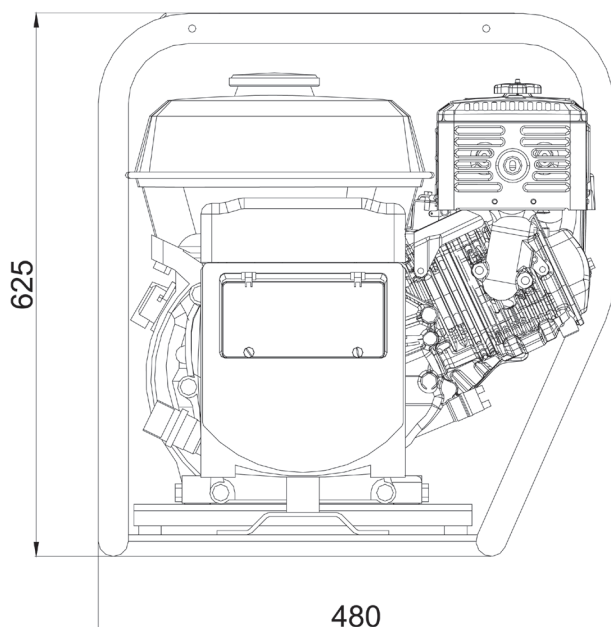

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa

Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.

Description

- Portable single-phase power generator
- Output power 5 kVA
- Petrol engine 3000 rpm
- Fuel tank 5,3 lt

Standard Features

- Low oil level shutdown device
- 2 x 230 V - 50 Hz single-phase Schuko socket
- protected by circuit breaker
- 12 Vdc battery charger outlet protected by fuse

Options

- Versions with different voltages
- 60Hz version
- Oversized fuel tank (25 lt)
- Automatic voltage regulator (AVR)

Accessories on request

- Trolley: two-wheels and handles

Noise level

- Lwa 95 (70 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase max. power : 5 kVA - 230 V
- Battery charger power: 120 W - 12 V - 10 A - DC
- Power Factor: $\cos \phi$ 0,8

**Petrol Engine
3000 rpm**

- Type: Honda GX 270 OHV - 1 cyl. 7,8 HP (5,8 kWm) - 270 cm³
- Cooling system: air
- Starting system: recoil
- Fuel tank capacity: 5,3 lt
- Fuel consumption @ 75%: 2,2 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 770 x 480 x 625 mm
- Dry weight: 60 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.