

# PD 10 S-KL



stage5V


Warning Lights





Emergency Stop



40 lt Fuel Tank

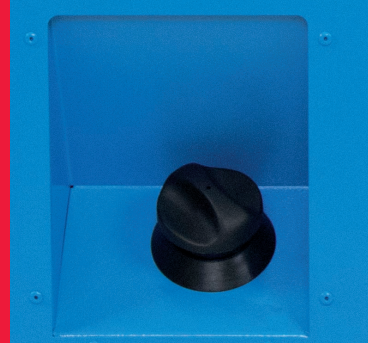

Unit of measure: mm

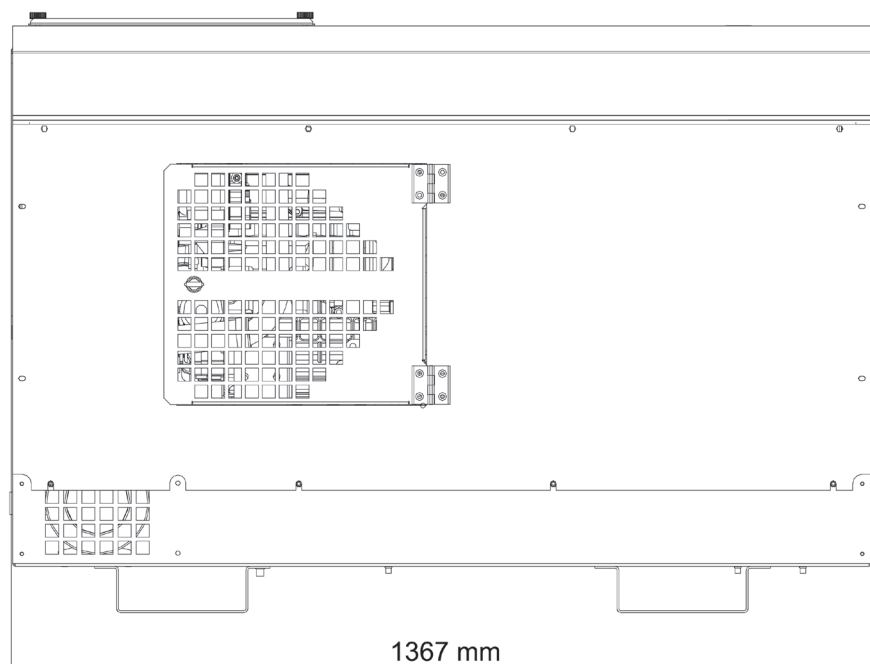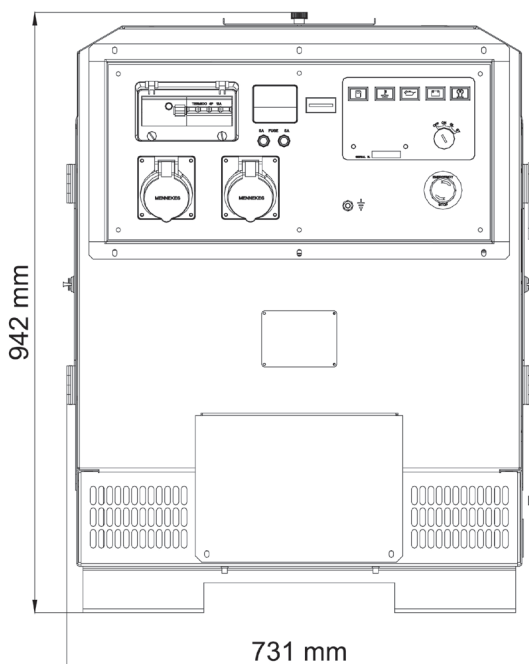

We reserve the right to change data, images and drawings without notice.  
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa  
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311  
[www.masegenerators.com](http://www.masegenerators.com) - [commercial@masegenerators.com](mailto:commercial@masegenerators.com)

**mase**  
**GENERATORS**  
Believing in change.

**Description**

- Silenced power generator
- Output power 10 kVA three-phase and 3,3 kVA single-phase
- Diesel engine 1500 rpm
- Fuel tank 40 lt

**Standard Features**

- Auto engine protection shutdown system with warning lights for:
  - battery charger failure
  - high water temperature
  - low fuel level
  - low oil pressure
- 1 x 400V - 16A EEC three-phase socket
- 1 x 230V - 16A EEC single-phase socket
- 12 V battery
- Power output protection
- Earth Leakage Circuit Breaker
- Voltmeter
- Hourmeter
- Emergency stop button
- Fork-lift pockets
- Fitted for AMF-ATS or Remote control operation

**Options**

- Versions with different voltages
- 60Hz version

**Accessories on request**

- AMF/ATS panel
- Remote Start/Stop kit with cable (20 mt)
- Trolley: two wheels and handles

**Noise level**

- Lwa 95 (70 dB at 7 mt)

**AC generator - 50Hz**

- Type: synchronous
- Three-phase power (stand-by): 10kVA - 400V
- Three-phase power (prime): 9kVA - 400V
- Single-phase power (max.): 3,3kVA - 230V
- Power Factor:  $\cos \phi$  0,8

**Diesel Engine  
1500 rpm**

- Type: Kubota D1105 - 3 cyl. - 1123 cm<sup>3</sup>
- Max power: 12,7 hp (9,5 kWm)
- Starting system: electric (12Vdc)
- Cooling system: water
- Fuel consumption @ 75%: 2 lt/h

**Other features**

- Insulation Class: H
- Ambient temperature: 40°C (\*)
- Altitude: 1000 m (\*)
- Mechanical Protection: IP 23
- Fuel tank capacity: 40 lt
- Dimensions (L x W x H): 1357 x 707 x 942 mm
- Dry weight: 350 kg

(\*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.