

VOYAGER 5010 DM




stage **5V**

Control panel





3000 rpm Yanmar engine

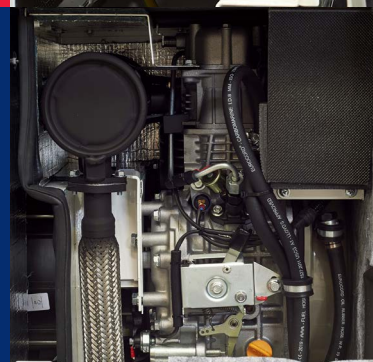

Fuel inlet and outlet



Unit of measure: mm

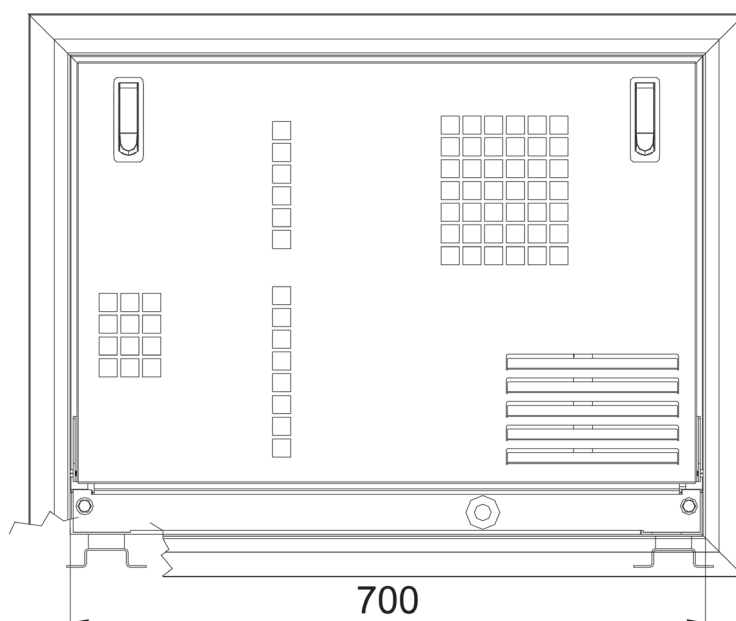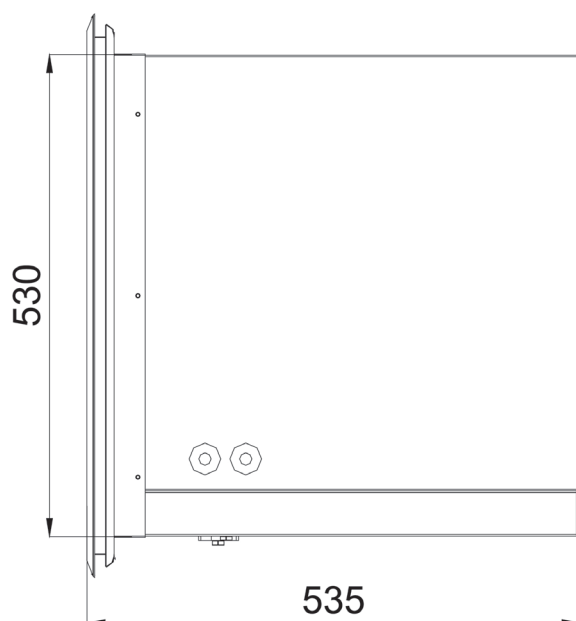

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.

Description

- Vehicular power generator
- Diesel engine 3000 rpm
- Super silenced model

Standard Features

- Remote control panel with: multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, rpm
- Start / Stop button
- Connection cable to remote panel
- Safety shutdown in case of: low oil level, high water temperature
- Engine failure warning lights
- Hourmeter
- Circuit breaker for the generator protection
- General shutdown switch
- External muffler

Options

- 20 lt plastic fuel tank with brackets
- 20 lt steel fuel tank with brackets
- Fuel reserve indicator kit
- Fuel filler with key lock cap
- 1 mt fuel pipe for connection tank-fuel filler
- Fuel pipe I/O to the automatic tank

Noise level

- Lwa 89 (64 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 6,25 kVA - 230V
- Power Factor: $\cos \phi$ 0,8

Diesel Engine 3000 rpm

- Type: Yanmar L100V - 1 cyl. - 8,8 HP (6,5 kWm) - 435 cm³
- Cooling system: air
- Starting system: electric
- Fuel consumption @ 75%: 1,5 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 700 x 535 x 530 mm
- Dry weight: 145 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.